
# v1.5 Standup Bevi Requirements

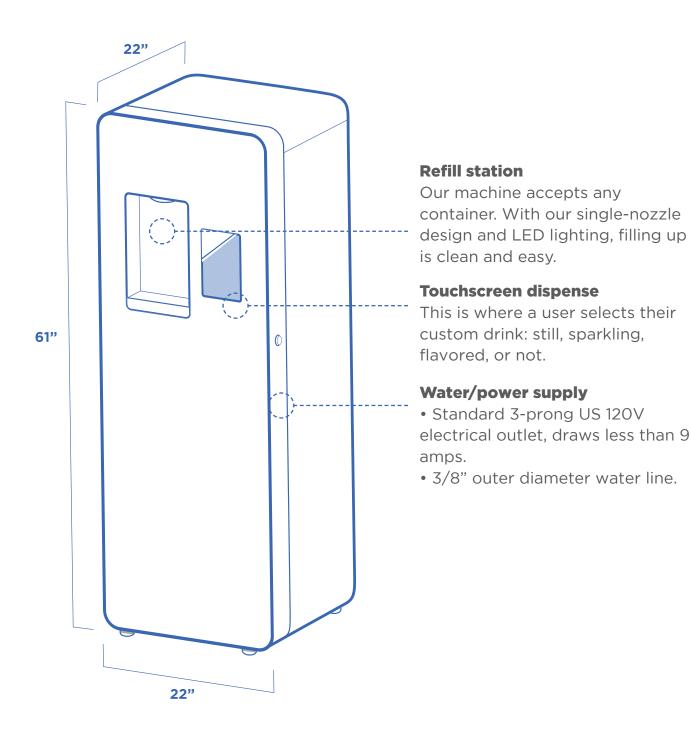

## **Installation Requirements**

### **Plumbing**

- Minimum inflow rate of 1.3 gal/min (5 L/min) at 50 psi (3.5 Bar)
- 3/8" outer diameter water line within 50 ft of the unit

### **Electrical**

- 110-120 VAC, 60 Hz, 9A max current draw
- GFCI protected, 3-prong outlet

#### Snace

• Minimum 6" ventilation room on the back, sides, and top of unit

### **Internet Connection**

• Wireless or Ethernet connection is required to enable the smart functions of Bevi. Cellular modem is available for ordering.